

JOB _____ ITEM # _____ QTY # _____

MODEL NUMBER:

- ☐ 2-CISL
- ☐ 3-CISL
- ☐ 2-CMSL
- ☐ 3-CMSL

DIMENSIONS:

- 2-CISL - 36"H x 19"D x 50"L
- 3-CISL - 36"H x 19"D x 72"L
- 2-CMSL - 36"H x 19"D x 50"L
- 3-CMSL - 36"H x 19"D x 72"L

ELECTRICAL - CM UNITS ONLY

- 120 volts single-phase
- Eight foot electrical cord with NEMA 5-15P plug
- On/Off switch and pilot light mounted on control panel of unit's operator side

REFRIGERATION SYSTEM - CM UNITS ONLY

- 1/3 horsepower compressor
- Fan-cooled condensing unit with an expansion valve pressure control switch
- Refrigerant coils shall be of copper tubing attached to the bottom of the well

COMMON OPTIONS

- Tray slides
- Protector guards
- Hinged or sliding doors on CI units
- See reverse side for additional options

WARRANTY

One year parts and labor. Warranty is detailed on inside front cover of the price list.




3CM-SL

The Elite 500 Slimline Cold unit is available mechanically cooled (CMSL) or ice only (CISL). The versatile modular design allows you to customize your tray make-up line, choosing only the options and accessories that you want and need.

STANDARD FEATURES

- 14-gauge stainless steel top with 1-1/2" turndown on all sides
- Top secured by four recessed bolts for easy access
- Framing includes 14-gauge top fastened to 14-gauge corner posts fastened to 14-gauge caster channels fastened to 18-gauge stainless steel bottom shelf, open control side
- 20-gauge stainless steel end and front panels are attached to legs
- 20-gauge stainless steel fully welded 5" deep well with drain
- Well is enclosed with insulation on sides, end and bottom
- 1" drain with shut off valve shall exit operator's left side as standard. Drain valve is 3/4" FPT.
- Open control side for additional storage capacity on Elite units
- Sliding doors standard on Mechanical (CMSL) units only
- Louvered panels for ventilation of condensing unit on CMSL units
- End louver panel removable to access compressor on CMSL units
- 5" diameter swivel plate casters, 2 with brakes

SPEC A-2B

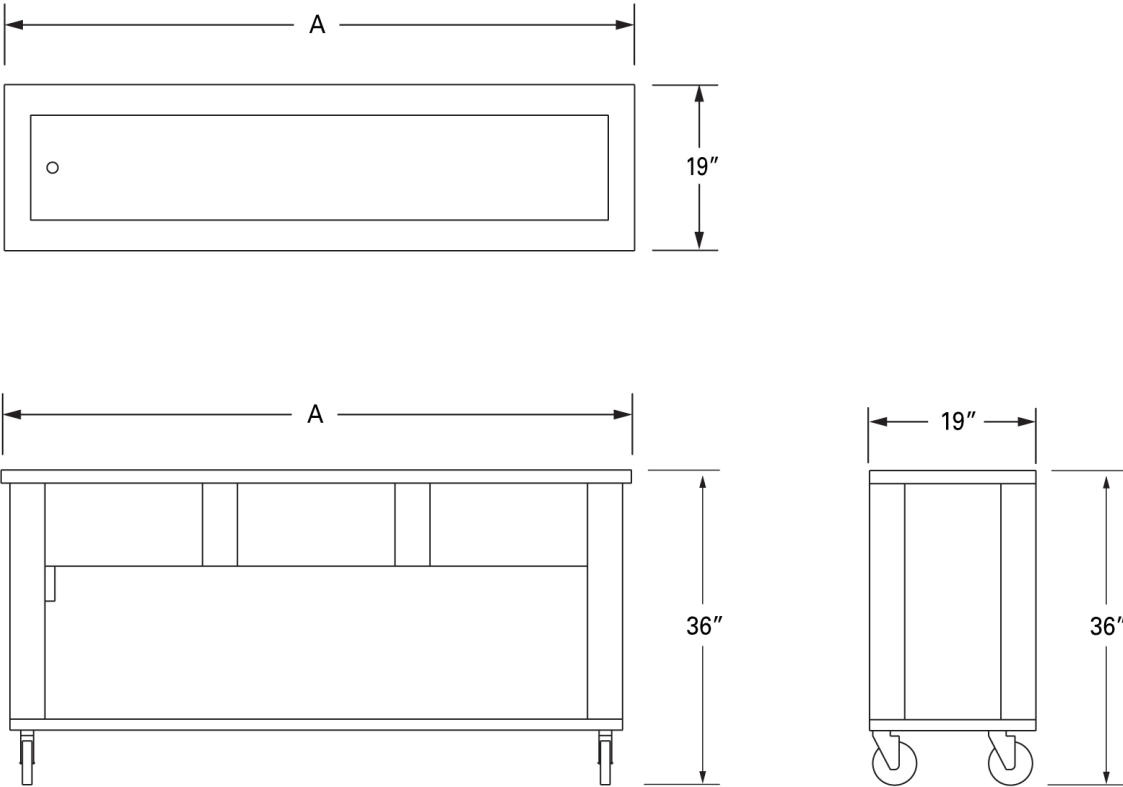

Model #	# of Wells	L	W	H	*Amperage 120V	*NEMA Cap No.	Ship Wt. (lbs)
2-CISL	2-12x20 Pan Capacity	50"	19"	36"	6.3	5-15P	225
3-CISL	3-12x20 Pan Capacity	72"	19"	36"	6.3	5-15P	265
2-CMSL	2-12x20 Pan Capacity	50"	19"	36"	n/a	n/a	225
3-CMSL	3-12x20 Pan Capacity	72"	19"	36"	n/a	n/a	265

DIMENSION ADDITIONS FOR OPTIONS

- Add 8" to width for cutting board
- Add 12-3/4" to width for solid ribbed tray slide
- Add 12-1/2" to width for 3-bar tray slide

Note: Line-up drawing required when ordering false front, cashier stand or interconnected units.

SPEC A-2B