

JOB \_\_\_\_\_ ITEM # \_\_\_\_\_ QTY # \_\_\_\_\_

## MODEL NUMBER:

- |                                    |                                    |                                    |
|------------------------------------|------------------------------------|------------------------------------|
| • <input type="checkbox"/> 3-HCMDI | • <input type="checkbox"/> 4-HCIDI | • <input type="checkbox"/> 6-HCMDI |
| • <input type="checkbox"/> 3-HCIDI | • <input type="checkbox"/> 5-HCMDI | • <input type="checkbox"/> 6-HCIDI |
| • <input type="checkbox"/> 4-HCIDI | • <input type="checkbox"/> 5-HCIDI |                                    |

## DIMENSIONS:

- 3-HCMDI - 45.625"L x 25.75"W
- 3-HCIDI - 45.625"L x 25.75"W
- 4-HCMDI - 59.625"L x 25.75"W
- 4-HCIDI - 59.625"L x 25.75"W
- 5-HCMDI - 73.625"L x 25.75"W
- 5-HCIDI - 73.625"L x 25.75"W
- 6-HCMDI - 87.625"L x 25.75"W
- 6-HCIDI - 87.625"L x 25.75"W

## REFRIGERATION SYSTEM

- Coils are mounted on sides and ends of cold pan
- 1/3 horsepower fan cooled condensing unit

## HEATER ASSEMBLY

- Unit has two 1000 watt elements on a 3-well unit, three 1000 watt elements on a 4-well unit, four 1000 watt elements on a 5-well unit and five 1000 watt elements on a 6-well unit
- All heating elements are installed under bottom of the well


Ice Cooled and Mechanically Refrigerated/Ice Cooled units are designed to be used with ice. Mechanical refrigeration is added to retard the melting of the ice. This unit has NOT been performance tested for the storage of potentially hazardous foods.

## COMMON OPTION

- Adaptor bars

## WARRANTY

- One year parts and labor. Warranty is detailed on inside front cover of the price list.

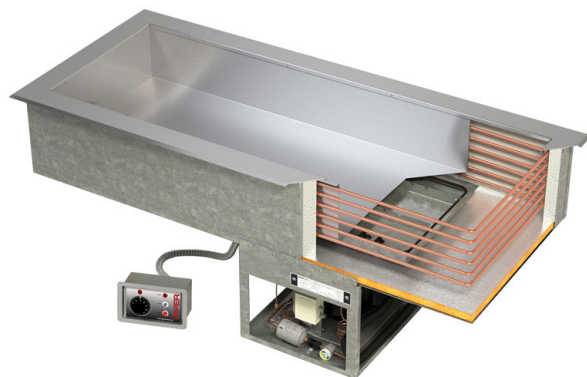

### 4-HCMDI

These Mechanically Refrigerated Hot/Cold Drop-in units can be used in your fabricated counter tops with the greatest of ease.

## STANDARD FEATURES

- 14-gauge stainless steel top with a feathered down edge on all sides
- Well is fabricated of 20-gauge stainless steel and is 7-1/2" deep
- Well is insulated with 1" thick fiberglass around sides and 2" thick fiberglass on bottom
- A 1" drain is built into the bottom of the well with shut-off valve
- Well is completely enclosed in a galvanized sheet housing, attached to framework


## ELECTRICAL

- Power supply is 120V-60-1, 120V/208V, 120V/240V dual voltages to operate refrigeration unit and heaters
- A 2" x 4" junction box is provided for field wiring. These units are mounted in all metal fixtures

NOTE: Control cutout for mechanically refrigerated model only, with 1" radius corners is 5-9/16" H x 9-9/16" W

D | DROP-INS

Hot/Cold Drop-In  
Mechanically Refrigerated Hot/Cold units

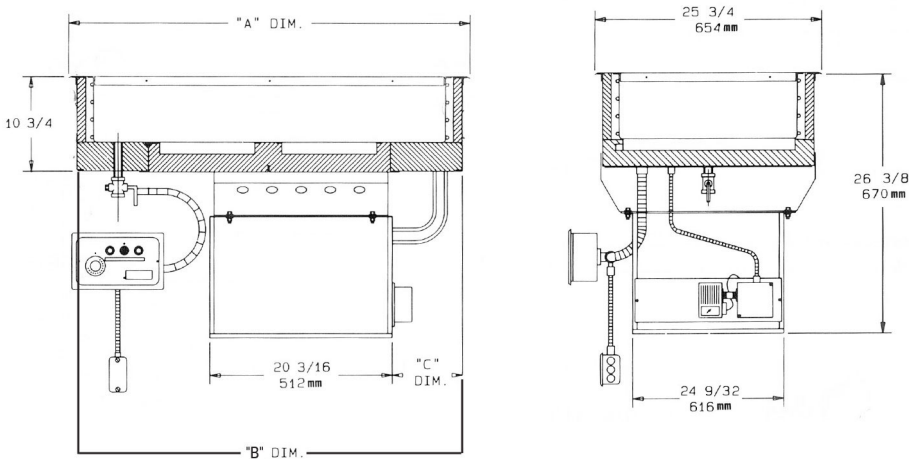

Unit Capacity	Cutout Dimensions	(A)	(B)	(C)	Refrigerated				Non-Refrigerated			
					Voltage	Amps	Watts	Ship Wt. (lbs)	Voltage	Amps	Watts	Ship Wt. (lbs)
2-Pan	25-3/16" x 31"	31-5/8"	29-7/8"	4-13/16"	120	8.3	1000	190	120	8.3	1000	120
					120/208	4.8	1000	190	208	4.8	1000	120
					120/240	4.2	1000	190	240	4.2	1000	120
3-Pan	25-3/16" x 45"	45-5/8"	43-7/8"	11-13/16"	120	16.5	2000	220	120	16.5	2000	150
					120/208	9.6	2000	220	208	9.6	2000	150
					120/240	8.3	2000	220	240	8.3	2000	150
4-Pan	25-3/16" x 59"	59-5/8"	57-7/8"	12"	120	14.4	3000	260	120	14.4	3000	190
					120/208	14.4	3000	260	208	14.4	3000	190
					120/240	12.5	3000	260	240	12.5	3000	190
5-Pan	25-3/16" x 73"	73-5/8"	71-7/8"	12"	120	33.3	4000	280	120	33.3	4000	220
					120/208	19.2	4000	280	208	19.2	4000	220
					120/240	15.7	4000	280	240	15.7	4000	220
6-Pan	25-3/16" x 87"	87-5/8"	85-7/8"	12"	120/208	24	5000	320	208	24	5000	250
					120/240	20.8	5000	320	240	20.8	5000	250

SPEC D-8