




RP-30



PIPER'S SUPERIOR FOUNDATION

Fully welded coated steel frame with 18 gauge base plate

Our double capacity RP-30 proofer acts as a great looking merchandiser! It also features the excellent heat and humidity controls found in all Super Systems products, ensuring consistent quality that's easy to achieve for all your proofed goods.

STANDARD FEATURES

- Individual heat and humidity controls provides precise control over proofing environment
- Individual heat controls go from 0° to 125° (optional 225°)
- High volume blowers Circulates heat and humidity efficiently
- Standard automatic humidity Eliminates manual fill water pan
- Full-view glass door provides sight-proofing
- Heavy-duty cabinet construction and stainless steel finish - interior and exterior - provides long life and easy maintenance

JOB _____ ITEM # _____ QTY # _____

MODEL NUMBER:

- ☐ RP-30

DIMENSIONS:

- RP-30 - 70"H x 55"W X 40" (includes handle)D

CONSTRUCTION

The proofer's interior and exterior shall be constructed of 20 gauge stainless steel. Corner posts constructed of 18 gauge stainless steel. The proofer shall have two thermostatically controlled 750 watt elements for creating heat and an infinitely controlled humidistat 1500 watt burner element for creating moisture. Proofer shall be brightly lit providing sight merchandising.


Proofer shall have two individual fuses. One for the proofer thermostat and heat element. One for the humidity infinite switch and burner element and the proofer lights.

WARMER OPTION (RP-30-W)

- Fully insulated
- Holds maximum temperature of 225°
- Maintains back-up product for display
- Separate humidity control keeps product at ideal moisture level for peak flavor

WARRANTY

- One year parts and labor. Warranty is detailed on inside front cover of the price list.

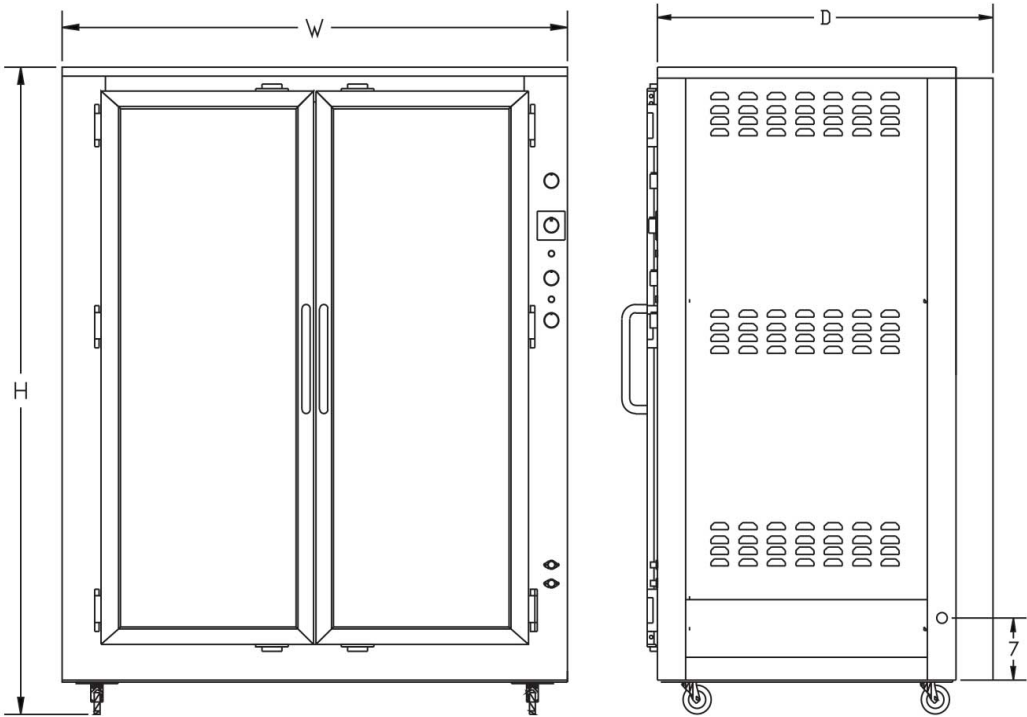

Exterior Dimensions: 70"H x 55"W x 36"D (40"D including handle)
Interior Dimensions: 57"H x 45"W x 30"D Racks are adjustable every 3 inches.

ELECTRICAL

VOLTS	PHASE	WIRE**	AMPS	WATTS	HERTZ
120	1	2	28	3,253.5	60
120/208	1	3	15	3,253.5	60
120/208	3	4	n/a	3,253.5	60
120/240	1	3	13	3,253.5	60
120/240	3	4	n/a	3,253.5	60

*Units are shipped without cord and plug. Designed to be hard wired. Installation requires a 4" clearance around the entire unit and should be made by a licensed electrician. Check local codes for vent hood requirements.

** Number of wires does not include ground.

ELECTRICAL Note: Automatic humidity feature, standard with the proofer section, requires 1/8" FPT water line to be supplied. Product failure caused by liming or sediment buildup is not covered under warranty.

NOTE: The Automatic Humidity feature is standard and requires water hook up to 1/8" FPT. The unit should be drained daily for proper operation.

COMMON OPTIONS

☐ Manual Fill Water pan

☐ W Warmer*

CAPACITY

PROOFER ACCOMMODATES:

- 16 nylon-coated wire racks (11 furnished with unit), 32, Standard 18" x 26" Sheet Pans, 32, Donut Screens, 36, 4-strapped 1lb Bread Pans, 27, 4-strapped 1.5lb Bread Pans, any combination of the above, additional rack are available

SHIPPING INFORMATION

- Shipping Weight:800
- Shipping Cubic Feet:88.65000000000001
- Freight Class:100